



1004B Hexscreen Electric Thruster with 3048R Motor Performance Table

Speed (RPM)	System Voltage (VDC)	Min Voltage (VDC)	Current (A rms)	Torque		Bollard Thrust		Reverse Thrust		Power Shaft		Power In		Efficiency (Pout/Pin)
				(N·M)	(In-Lbs)	0 (Lbf)	0 (Kgf)	(Lbf)	(Kgf)	(HP)	(Watts)	(Watts)	(HP)	
100	48	3.0	1.8	0.3	3.0	0	0.0	0	0.0	0.00	4	5	0.0	68.9%
200	48	4.8	1.9	0.4	3.2	0	0.1	0	0.1	0.01	8	9	0.0	80.9%
300	48	6.6	2.0	0.4	3.4	1	0.3	0	0.2	0.02	12	14	0.0	85.5%
500	48	10.3	2.4	0.5	4.2	2	0.7	1	0.6	0.03	25	28	0.0	88.9%
1000	48	20.3	4.5	0.9	7.8	7	3.0	6	2.6	0.12	92	103	0.1	89.6%
1100	48	22.4	5.1	1.0	8.8	8	3.6	7	3.2	0.15	115	128	0.2	89.4%
1200	48	24.6	5.8	1.1	9.9	10	4.4	8	3.9	0.19	141	158	0.2	89.1%
1300	48	26.8	6.5	1.3	11.1	11	5.1	10	4.5	0.23	171	193	0.3	88.7%
1400	48	29.1	7.2	1.4	12.4	13	6.0	12	5.3	0.28	206	233	0.3	88.4%
1500	48	31.4	8.0	1.6	13.8	15	6.9	13	6.1	0.33	245	279	0.4	88.0%
1600	48	33.7	8.9	1.7	15.3	17	7.9	15	6.9	0.39	290	331	0.4	87.6%
1700	48	36.1	9.8	1.9	16.9	20	9.0	17	7.9	0.46	340	390	0.5	87.2%
1800	48	38.5	10.8	2.1	18.6	22	10.0	19	8.8	0.53	396	456	0.6	86.7%
1900	48	40.9	11.8	2.3	20.4	25	11.2	22	9.9	0.61	458	531	0.7	86.3%
2000	48	43.4	12.9	2.5	22.2	27	12.4	24	10.9	0.71	526	613	0.8	85.9%


Table Information:

- 1) The Minimum Voltage column in the above table shows the minimum Voltage needed to achieve the performance at that corresponding propeller RPM/Thrust.
- 2) The Current shown represents the continuous RMS Current to the motor to achieve the Thrust at the corresponding propeller RPM.
- 3) The Shaft HP developed is a function of the propeller and increases with propeller RPM.
- 4) The maximum performance achieved will depend on the limitations of customers system Voltage and driver Current capacity.
- 5) For Thrust at Forward Vehicle Speed (Kts), anything lower than 500 RPM varies greatly with vehicle design.
- 6) The Current/RPM might need to be limited depending on customer connector spec and or system Current limitations.
- 7) Minimum Voltage to achieve full Thrust is 43 VDC.
- 8) Max Voltage should not exceed 10% of rated Voltage.



INNERSPACE CORPORATION
E. EDNA PLACE, COVINA, CA 91724 1138
TEL: (626) 331-0921 FAX: (626) 966-6391
www.innerspacethrusters.com

1004B-3048R Hexscreen Electric Thruster Thrust (Lbf) vs Voltage (Vdc)

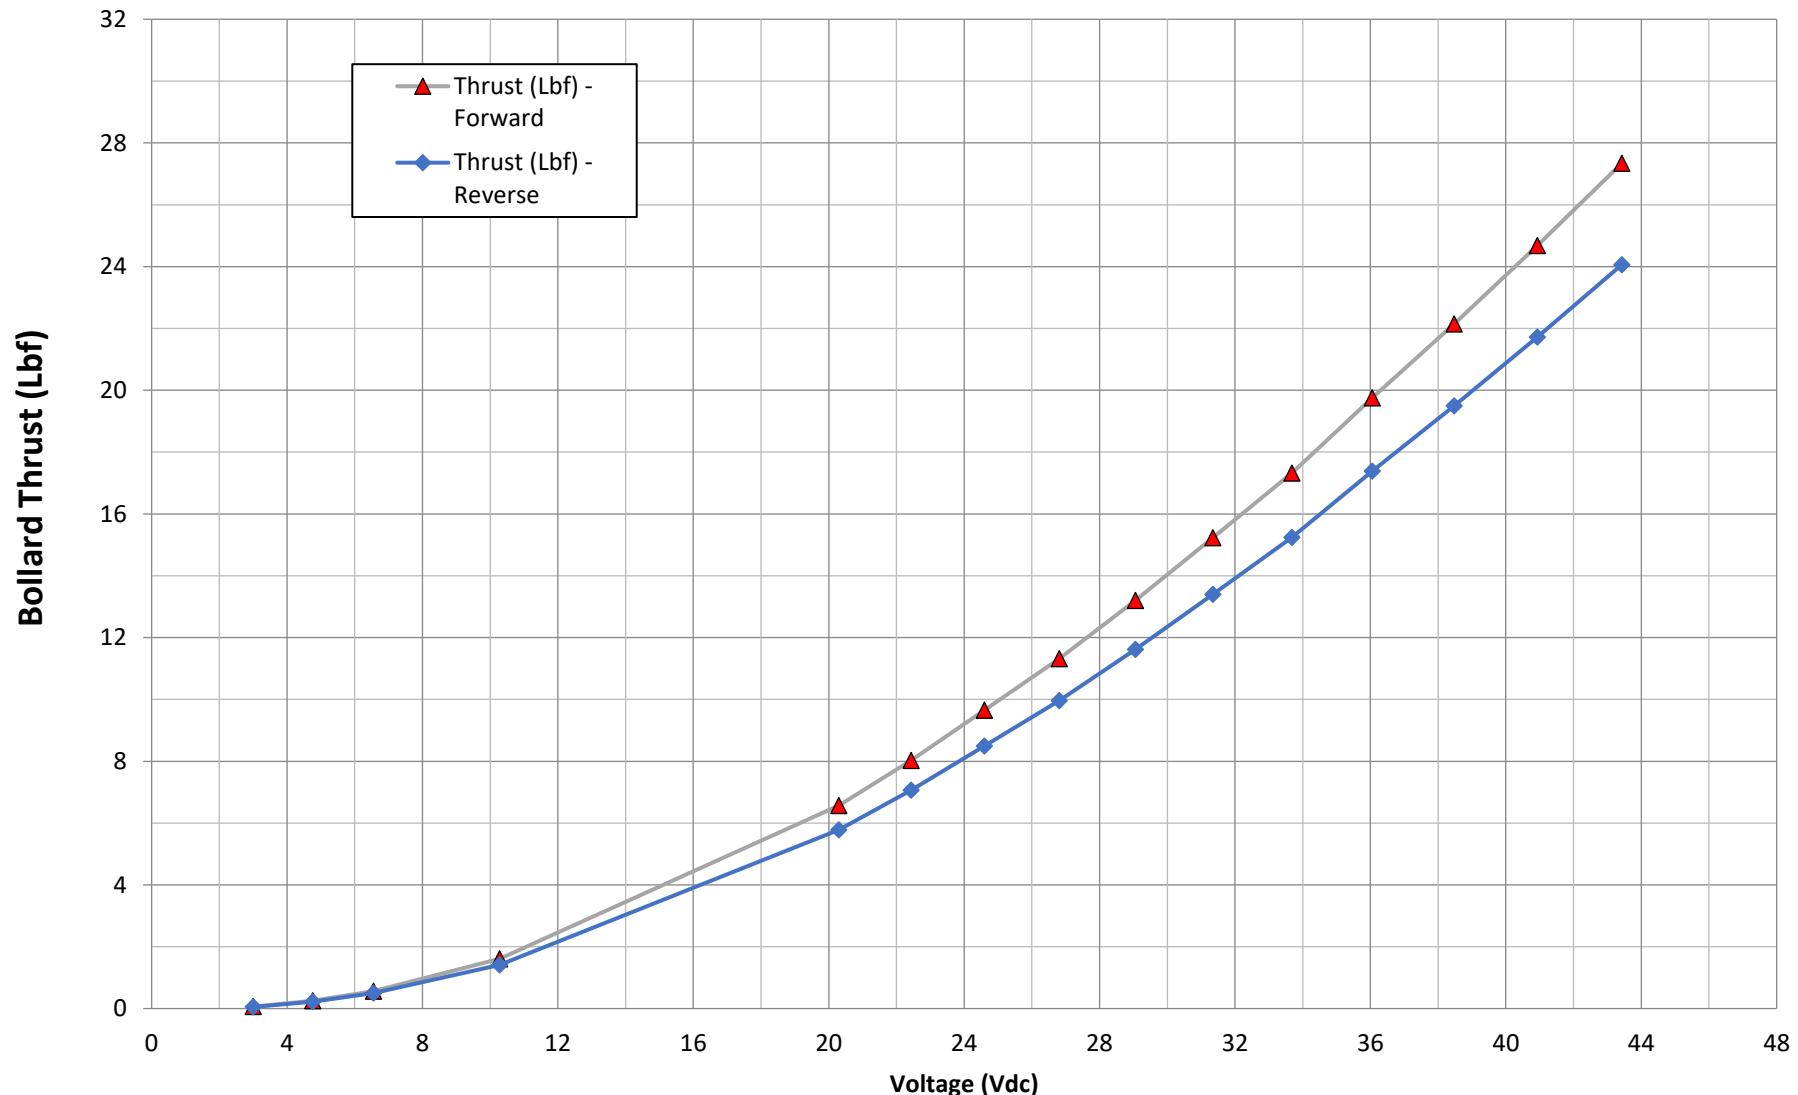


Note:

System Voltage equals 48 Vdc. Graph shows Thrust with Voltages below 48 Vdc.



INNERSPACE CORPORATION
1138 E. EDNA PLACE, COVINA, CA 91724
TEL: (626) 331-0921 FAX: (626) 966-6391
www.innerspacethrusters.com

1004B-3048R Hexscreen Electric Thruster Thrust (Kgf) vs Voltage (Vdc)

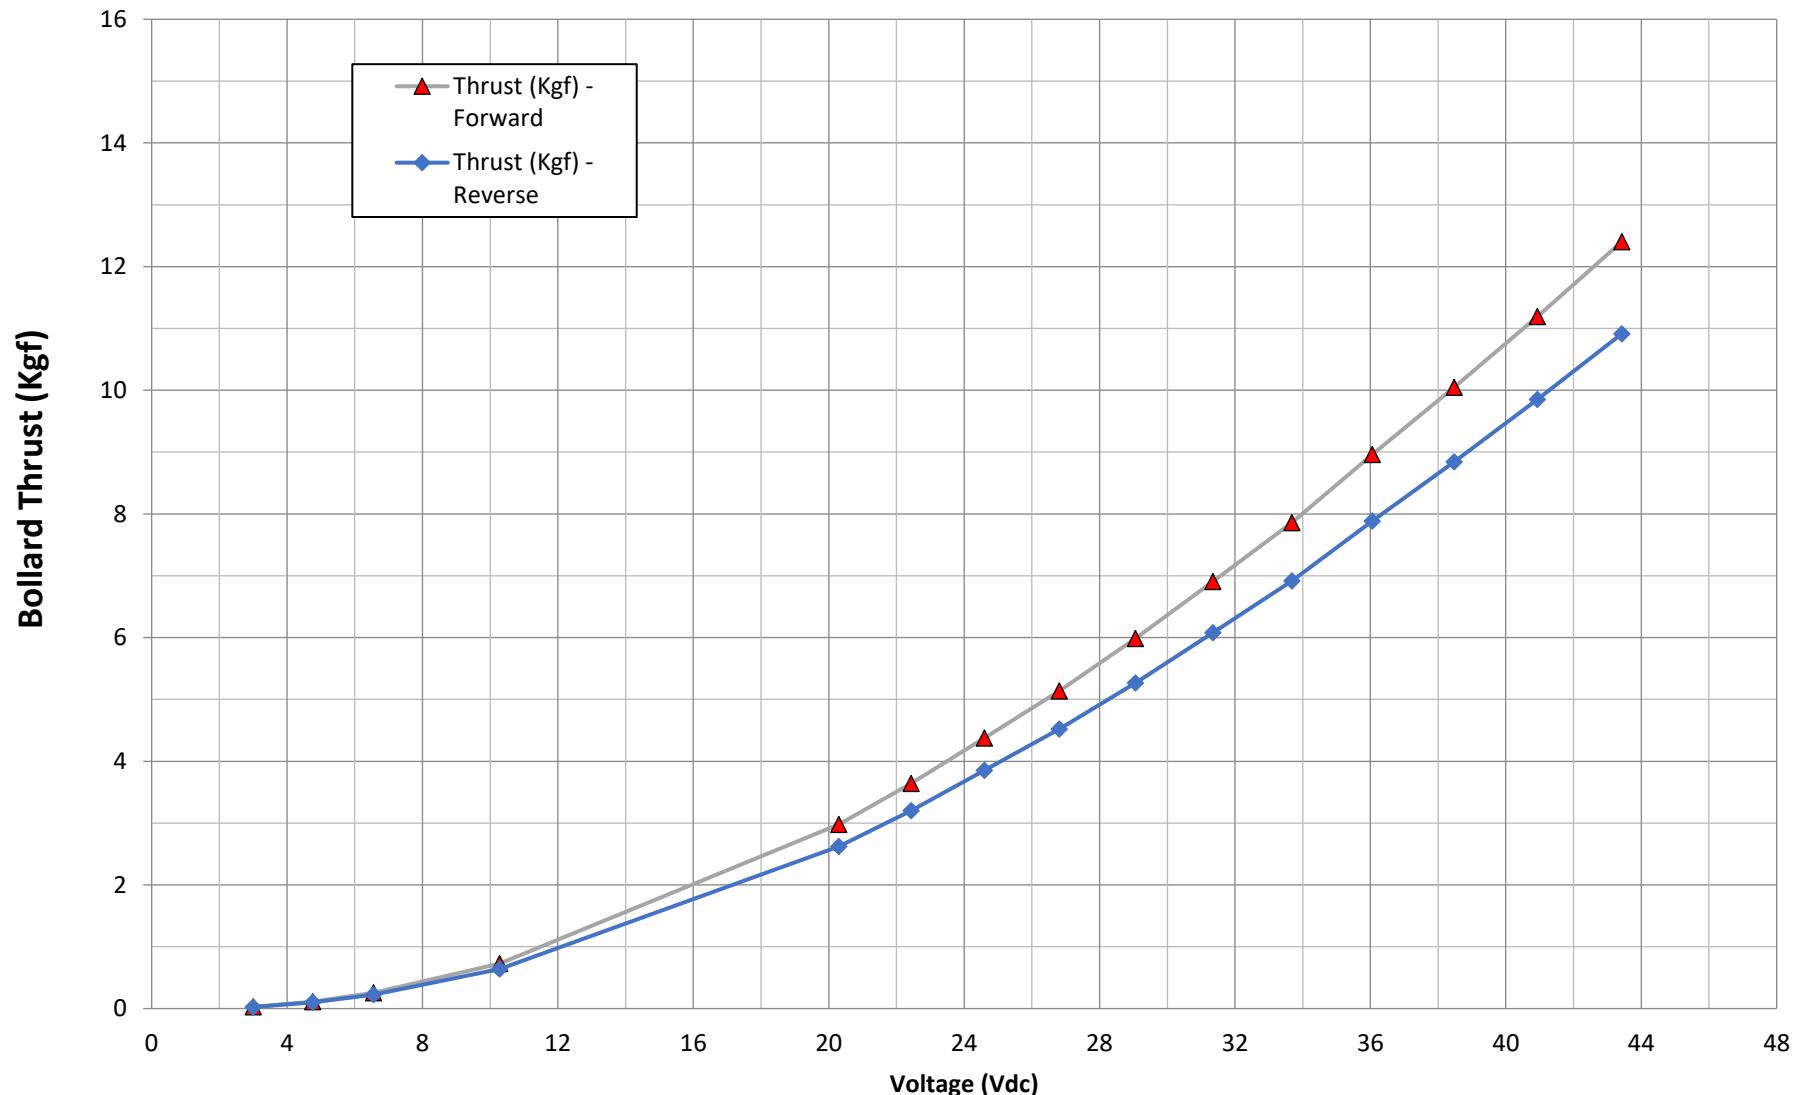


Note:

System Voltage equals 48 Vdc. Graph shows Thrust with Voltages below 48 Vdc.



INNERSPACE CORPORATION
E. EDNA PLACE, COVINA, CA 91724 1138
TEL: (626) 331-0921 FAX: (626) 966-6391
www.innerspacethrusters.com

1004B-3048R Hexscreen Electric Thruster Thrust (Lbf) vs Power In (HP)

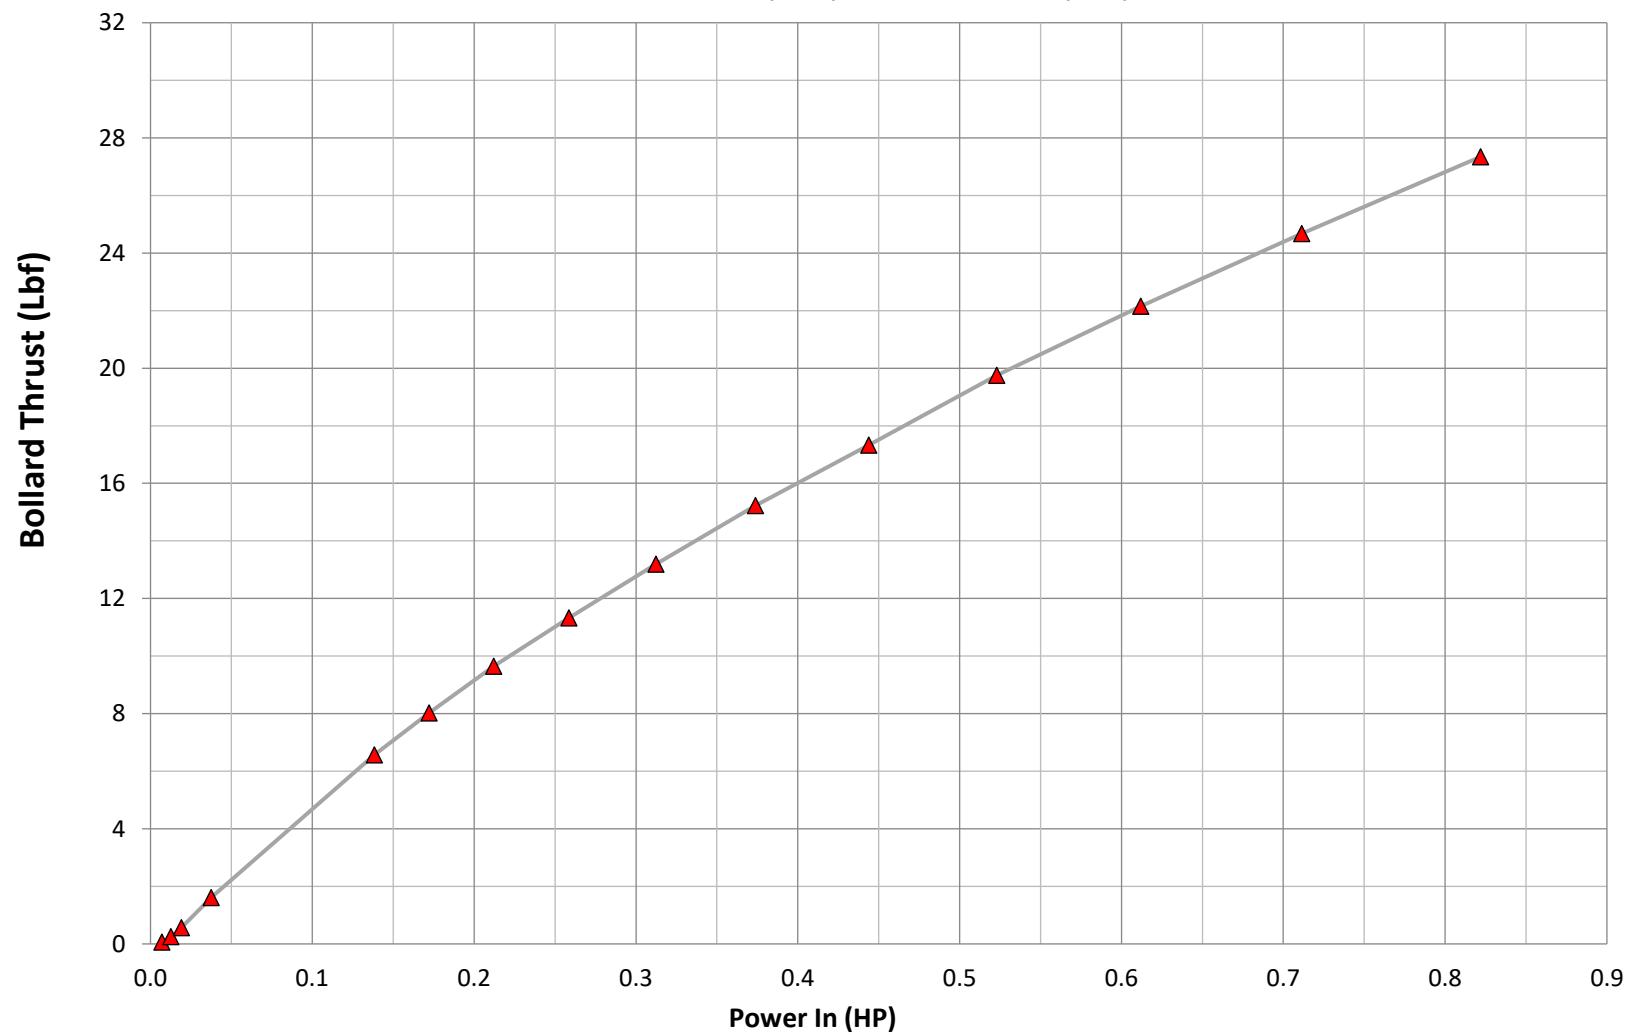



INNERSPACE CORPORATION
E. EDNA PLACE, COVINA, CA 91724 1138
TEL: (626) 331-0921 FAX: (626) 966-6391
www.innerspacethrusters.com

1004B-3048R Hexscreen Electric Thruster Thrust (Kgf) vs Power In (Watts)

